



10/8t

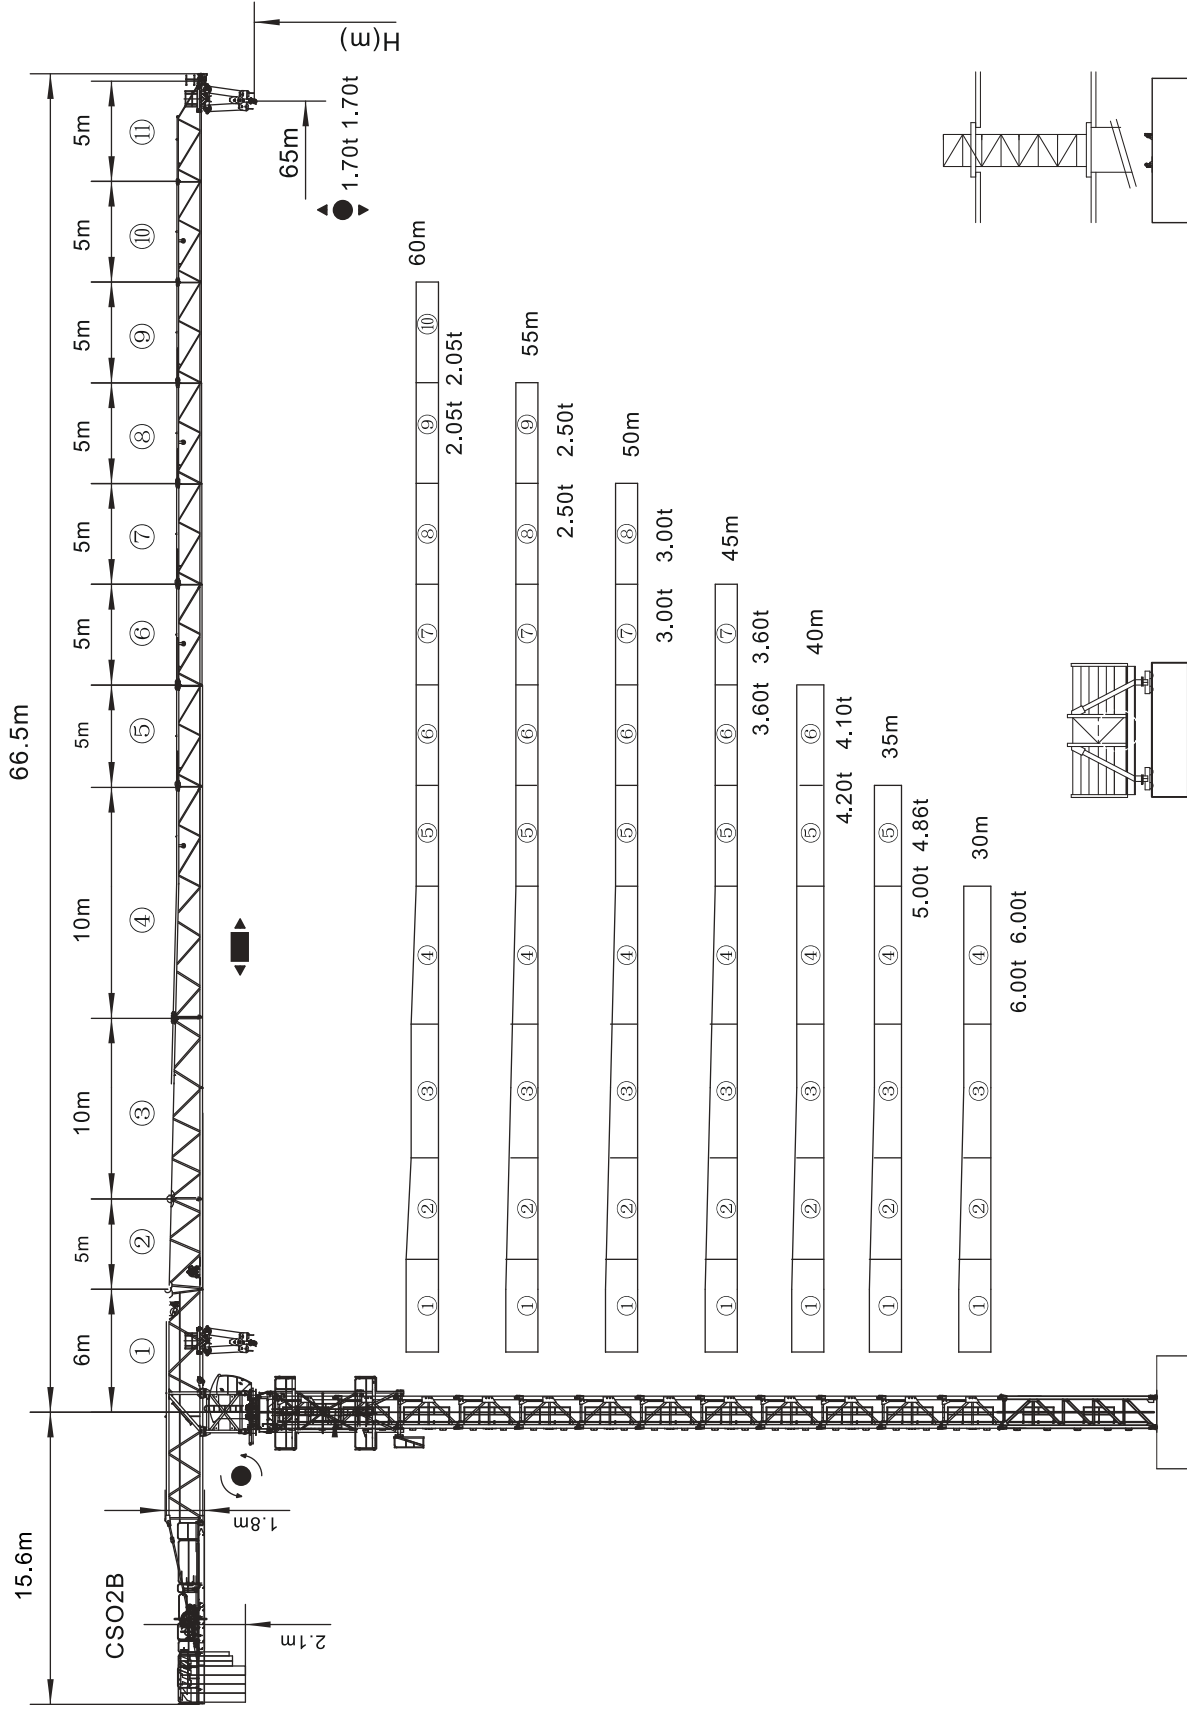

10/8t


載荷表 Load Chart 單小車 1-trolley

R (m)	倍率 Fall	R (Cmax) (m)	Cmax (t)	15	20	25	30	35	40	45	50	55	60	65
65	II	29.53	5.00	5.00	5.00	5.00	4.90	4.04	3.40	2.91	2.51	2.19	1.93	1.70
	IV	16.37	10.00	10.00	7.89	6.03	4.80	3.94	3.30	2.81	2.41	2.09	1.83	1.60
60	II	30.77	5.00	5.00	5.00	5.00	5.00	4.26	3.59	3.07	2.66	2.33	2.05	
	IV	17.04	10.00	10.00	8.28	6.33	5.06	4.16	3.49	2.97	2.56	2.23	1.95	
55	II	32.33	5.00	5.00	5.00	5.00	5.00	4.53	3.83	3.29	2.85	2.50		
	IV	17.88	10.00	10.00	8.76	6.72	5.38	4.43	3.73	3.19	2.75	2.40		
50	II	33.54	5.00	5.00	5.00	5.00	5.00	4.74	4.01	3.45	3.00			
	IV	18.53	10.00	10.00	9.14	7.02	5.63	4.64	3.91	3.35	2.90			
45	II	34.66	5.00	5.00	5.00	5.00	5.00	4.94	4.18	3.60				
	IV	19.13	10.00	10.00	9.49	7.30	5.86	4.84	4.08	3.50				
40	II	34.76	5.00	5.00	5.00	5.00	5.00	4.96	4.20					
	IV	19.19	10.00	10.00	9.53	7.32	5.88	4.86	4.10					
35	II	35.00	5.00	5.00	5.00	5.00	5.00	5.00						
	IV	19.31	10.00	10.00	9.60	7.38	5.93	4.90						
30	II	30.00	5.00	5.00	5.00	5.00	5.00							
	IV	19.51	10.00	10.00	9.71	7.47	6.00							

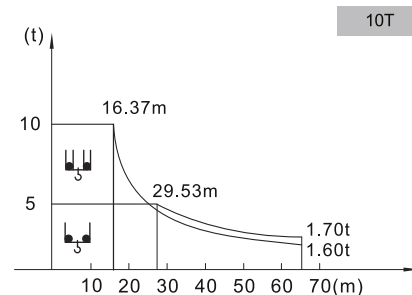


載荷表 Load Chart 單小車 1-trolley

R (m)	倍率 Fall	R (Cmax) (m)	Cmax (t)	15	20	25	30	35	40	45	50	55	60	65
65	II	35.32	4.00	4.00	4.00	4.00	4.00	4.00	3.41	2.91	2.51	2.19	1.93	1.70
	IV	19.79	8.00	8.00	7.90	6.03	4.81	3.95	3.31	2.81	2.41	2.09	1.83	1.60
60	II	36.80	4.00	4.00	4.00	4.00	4.00	4.00	3.59	3.08	2.66	2.33	2.05	
	IV	20.60	8.00	8.00	8.00	6.34	5.06	4.16	3.49	2.98	2.56	2.23	1.95	
55	II	38.67	4.00	4.00	4.00	4.00	4.00	4.00	3.83	3.29	2.85	2.50		
	IV	21.62	8.00	8.00	8.00	6.73	5.38	4.44	3.73	3.19	2.75	2.40		
50	II	40.12	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.45	3.00			
	IV	22.42	8.00	8.00	8.00	7.03	5.63	4.65	3.92	3.35	2.90			
45	II	41.45	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.60				
	IV	23.15	8.00	8.00	8.00	7.30	5.86	4.84	4.08	3.50				
40	II	40.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00					
	IV	23.21	8.00	8.00	8.00	7.33	5.88	4.86	4.10					
35	II	35.00	4.00	4.00	4.00	4.00	4.00	4.00						
	IV	23.21	8.00	8.00	8.00	7.33	5.88	4.86						
30	II	30.00	4.00	4.00	4.00	4.00	4.00							
	IV	23.60	8.00	8.00	8.00	7.47	6.00							

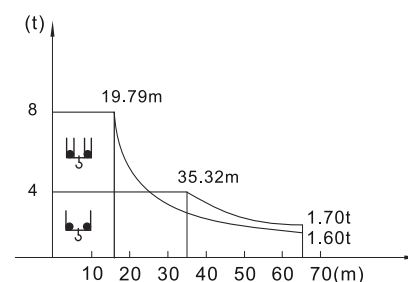

塔身截面 Mast L46A1/L46S 反力 Reactions

10/8t

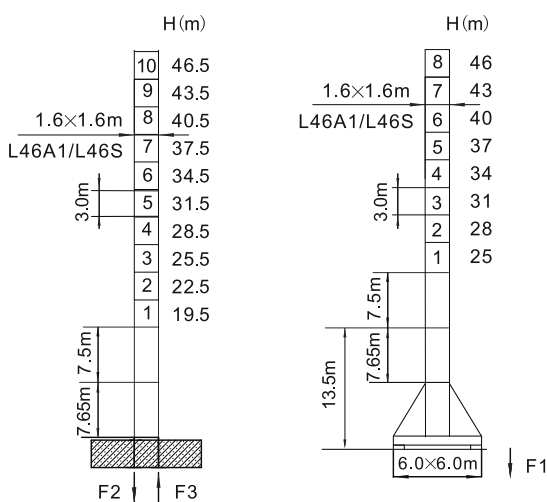


	●	■
F2	126t	159t
F3	86t	124t
⚖	50t	

	●	■
F1	76t	85t
⚖	60t	

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
L46A1/L46S	39	7-11	73	20.9	2.15	1.8	2.45	2.38

塔身截面 Mast ZG18 反力 Reactions

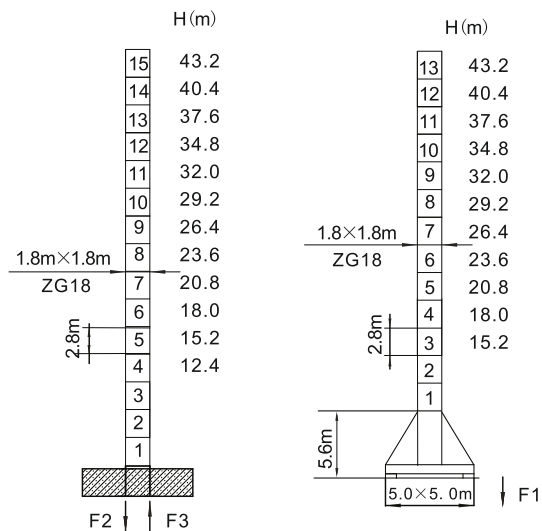

	●	■
F2	112t	136t
F3	72t	103t
⚖	52t	

	●	■
F1	74t	77t
⚖	62t	

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
ZG18	40.4	7-11	72	23.3	2.58	2.17	2.78	3.29

● 工作狀態支反力 In service reaction




■ 非工作狀態支反力 Out of service reaction

⚖ 整機自由高度重量 (不含平衡重及壓重重量)

Total weight of free standing crane (excludes counter weight & ballast)


塔身截面 Mast L68A1 反力 Reactions

10/8t

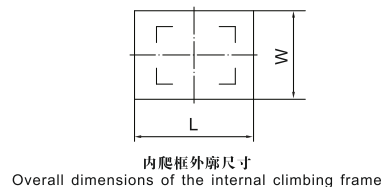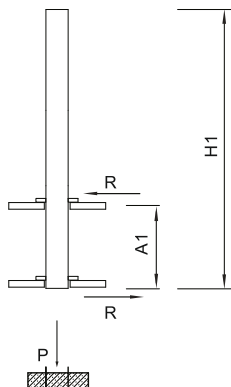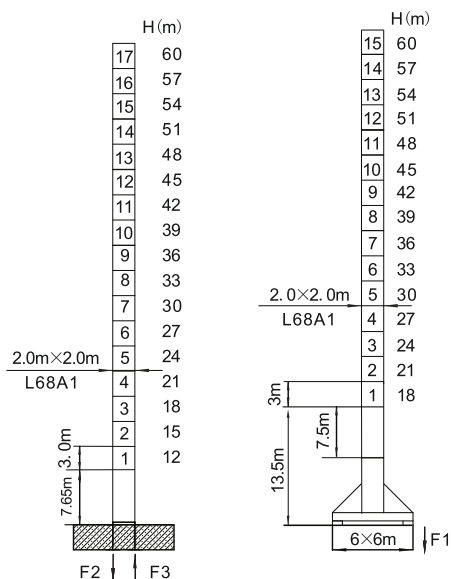

内爬框外廓尺寸

Overall dimensions of the internal climbing frame



内爬開口尺寸

Dimensions of the internal climbing opening

	●	■
F2	126t	210t
F3	82t	171t
	72t	

	●	■
F1	78t	102t
	84t	

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
L68A1	54	16	103	23.2	2.58	2.17	2.78	3.29

● 工作狀態支反力 In service reaction

■ 非工作狀態支反力 Out of service reaction


⚖ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast)

附着 Anchoring

固定式附着高度 Anchoring height of stationary crane

塔身截面 Mast □ 1.6×1.6m

如需達到更高, 請與我們聯系。When using height further, contact us please.

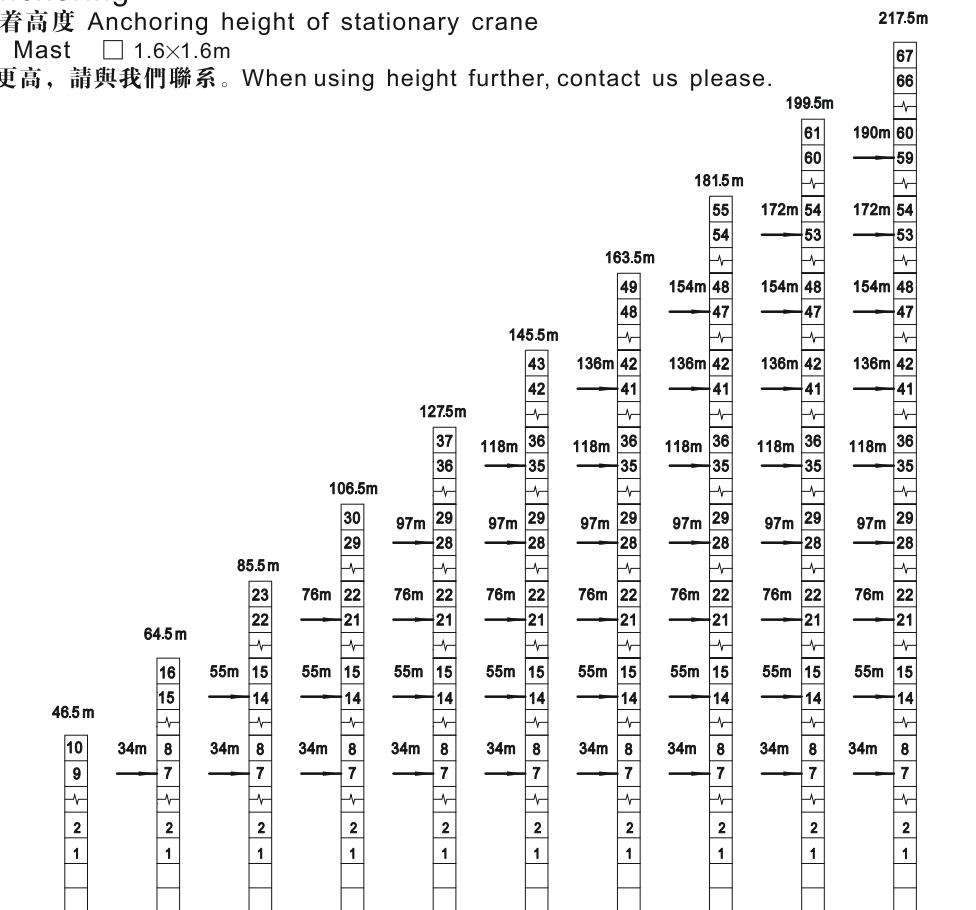


10/8t

附着 Anchoring

固定式附着高度 Anchoring height of stationary crane

塔身截面 Mast $\square 1.8 \times 1.8\text{m}$

如需達到更高，請與我們聯系。When using height further, contact us please.

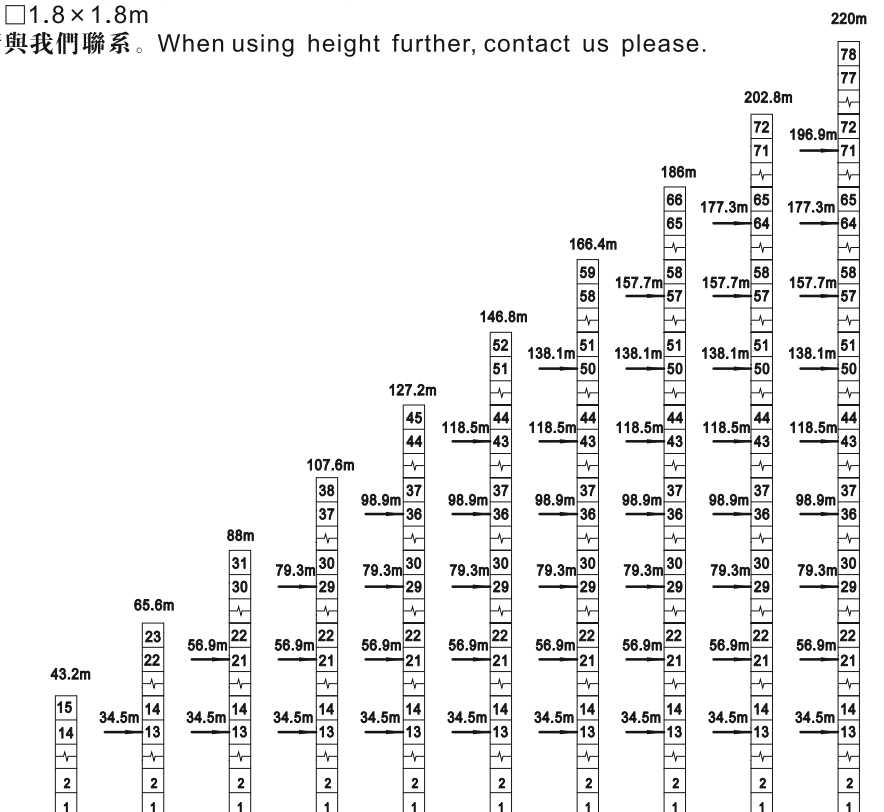


附着 Anchoring

固定式附着高度 Anchoring height of stationary crane

塔身截面 Mast $\square 2.0 \times 2.0\text{m}$

如需達到帶★高度或更高，請與我們聯系。

When using ★ height or further, contact us please.

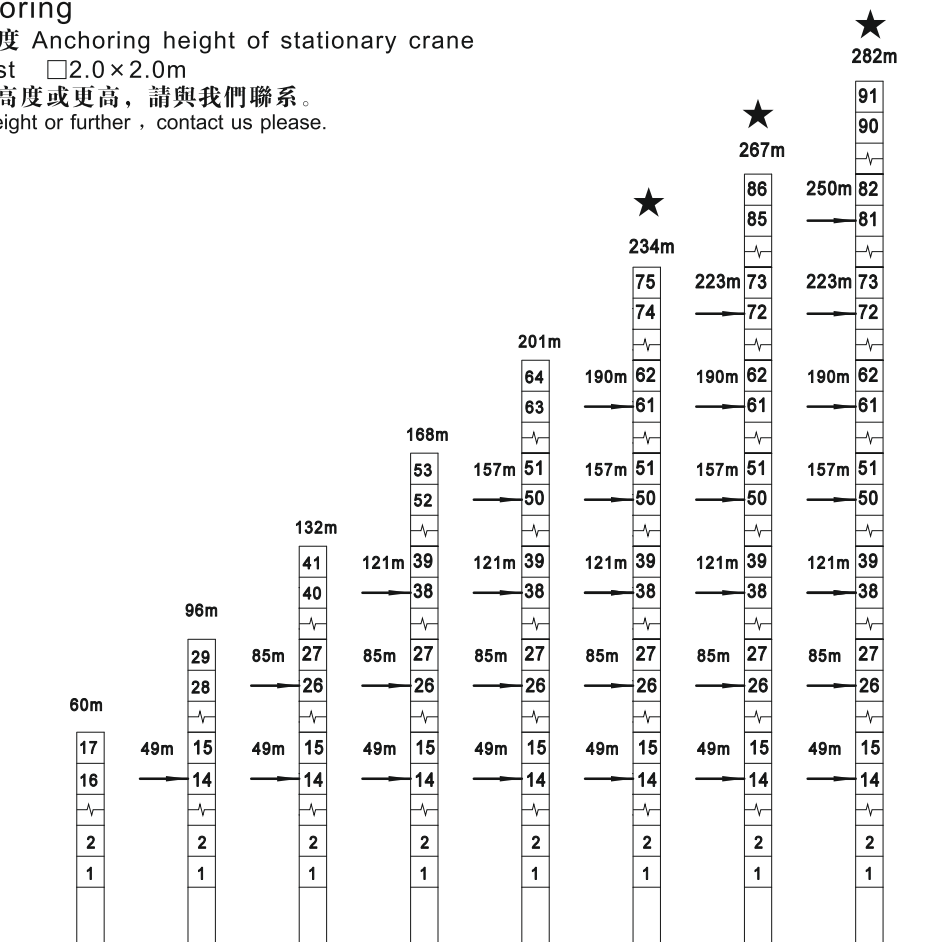

10/8t

電圧 Pressure	kVA
380V (±10%) 50Hz	40LVF20B :60 50LVF25A:71

☆ 標準配置 Standard configuration.