


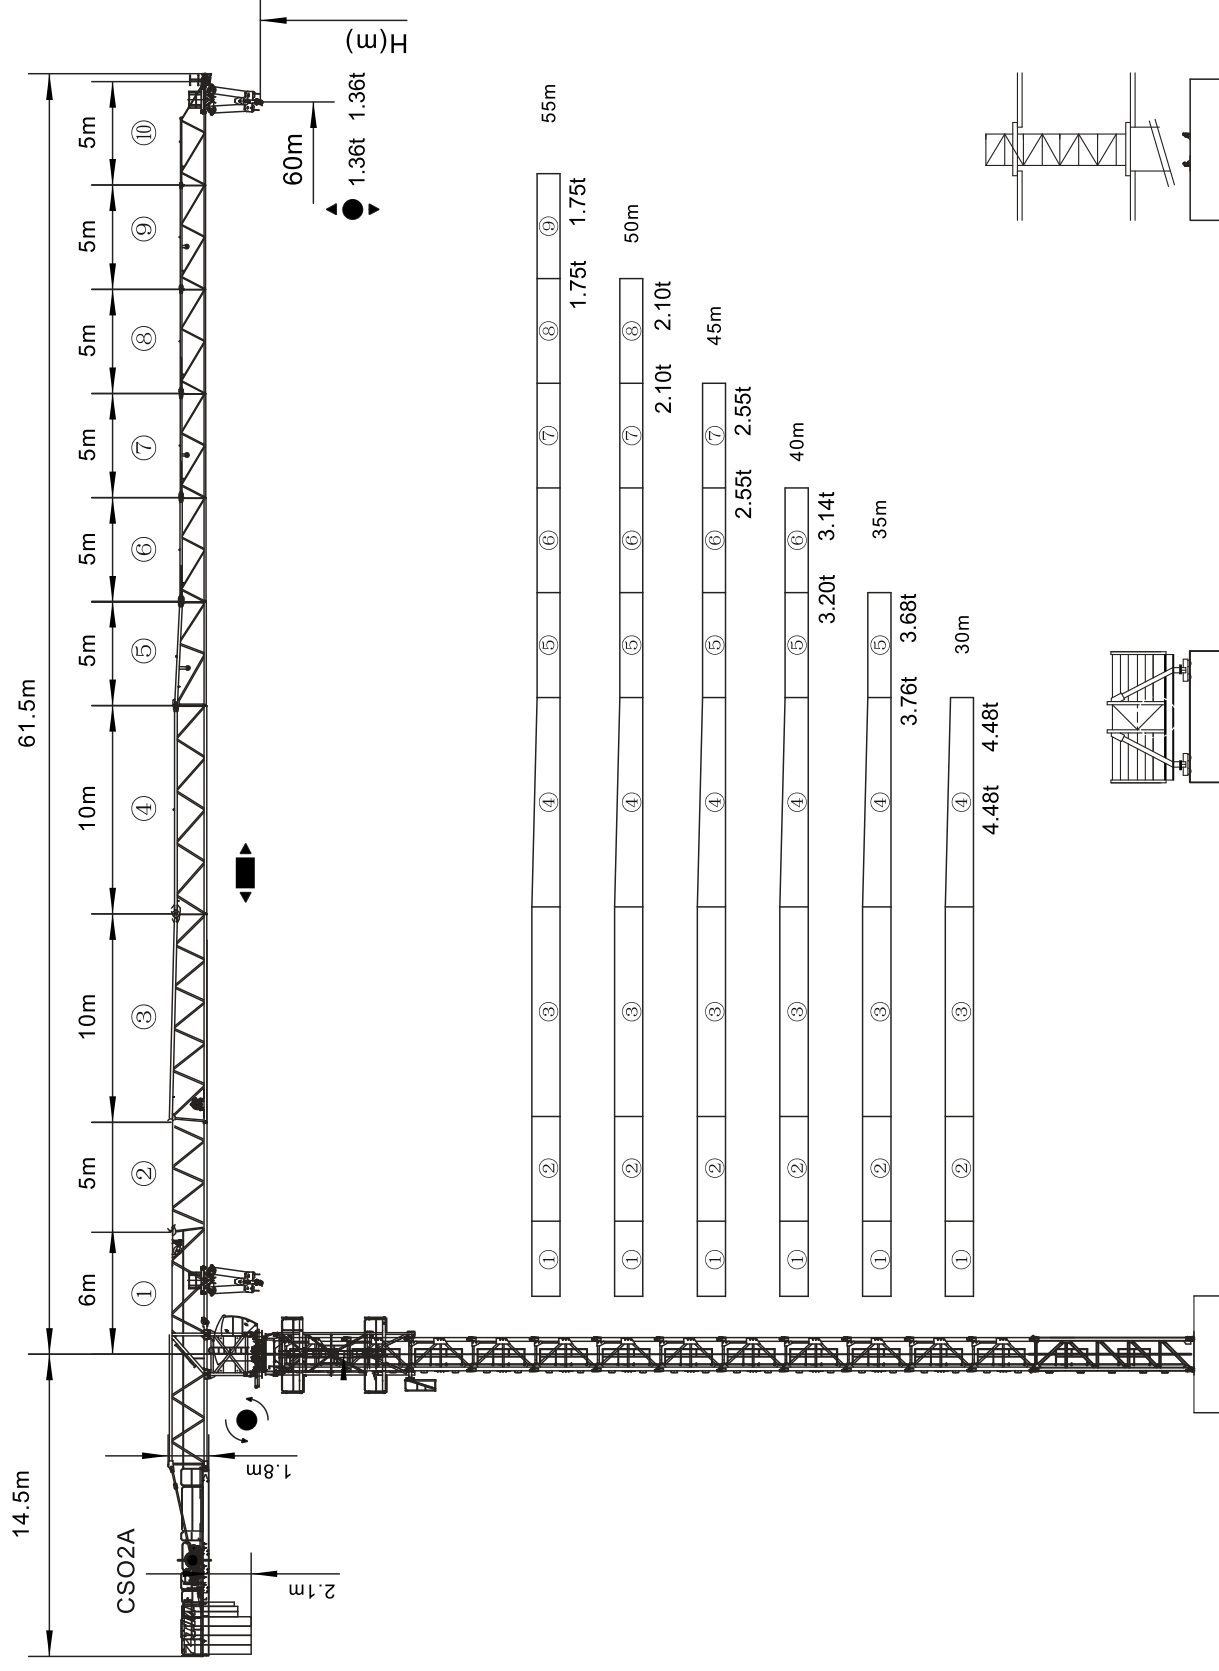


8t/6t

載荷表 Load Chart 單小車 1-trolley

R m	倍率 Fall	R Cmax m	Cmax t	15	20	25	30	35	40	45	50	55	60
60	II	26.24	4.00	4.00	4.00	4.00	3.40	2.81	2.38	2.04	1.76	1.54	1.36
	IV	14.36	8.00	7.61	5.45	4.18	3.34	2.75	2.32	1.98	1.70	1.48	1.30
55	II	28.66	4.00	4.00	4.00	4.00	3.79	3.14	2.66	2.29	1.99	1.75	
	IV	15.64	8.00	8.00	6.03	4.64	3.73	3.08	2.60	2.23	1.93	1.69	
50	II	29.81	4.00	4.00	4.00	4.00	3.97	3.30	2.80	2.41	2.10		
	IV	16.26	8.00	8.00	6.31	4.86	3.91	3.24	2.74	2.35	2.04		
45	II	31.16	4.00	4.00	4.00	4.00	4.00	3.48	2.96	2.55			
	IV	16.97	8.00	8.00	6.63	5.12	4.12	3.42	2.90	2.49			
40	II	33.23	4.00	4.00	4.00	4.00	4.00	3.76	3.20				
	IV	18.08	8.00	8.00	7.13	5.51	4.45	3.70	3.14				
35	II	33.23	4.00	4.00	4.00	4.00	4.00	3.76					
	IV	18.00	8.00	8.00	7.09	5.49	4.43	3.68					
30	II	30.00	4.00	4.00	4.00	4.00	4.00						
	IV	18.17	8.00	8.00	7.17	5.55	4.48						


8T

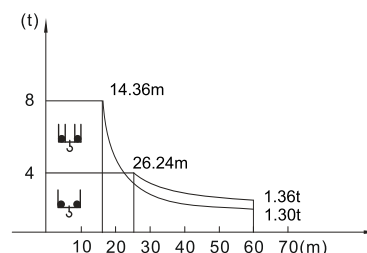

載荷表 Load Chart 單小車 1-trolley




R m	倍率 Fall	R Cmax m	Cmax t	15	20	25	30	35	40	45	50	55	60
60	II	33.25	3.00	3.00	3.00	3.00	3.00	2.81	2.38	2.04	1.76	1.54	1.36
	IV	18.41	6.00	6.00	5.45	4.18	3.34	2.75	2.32	1.98	1.70	1.48	1.30
55	II	36.34	3.00	3.00	3.00	3.00	3.00	3.00	2.66	2.29	1.99	1.75	
	IV	20.08	6.00	6.00	6.00	4.64	3.73	3.08	2.60	2.23	1.93	1.69	
50	II	37.80	3.00	3.00	3.00	3.00	3.00	3.00	2.80	2.41	2.10		
	IV	20.88	6.00	6.00	6.00	4.86	3.91	3.24	2.74	2.35	2.04		
45	II	39.52	3.00	3.00	3.00	3.00	3.00	3.00	2.96	2.55			
	IV	21.81	6.00	6.00	6.00	5.12	4.12	3.42	2.90	2.49			
40	II	40.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00				
	IV	23.24	6.00	6.00	6.00	5.51	4.45	3.70	3.14				
35	II	35.00	3.00	3.00	3.00	3.00	3.00	3.00					
	IV	23.14	6.00	6.00	6.00	5.49	4.43	3.68					
30	II	30.00	3.00	3.00	3.00	3.00	3.00						
	IV	23.37	6.00	6.00	6.00	5.55	4.48						

6T

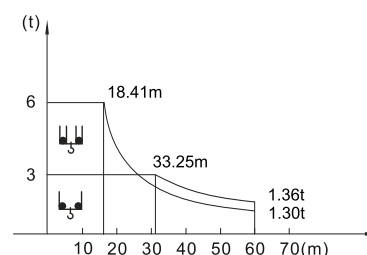

8t/6t

塔身截面 Mast ZG16 反力 Reactions

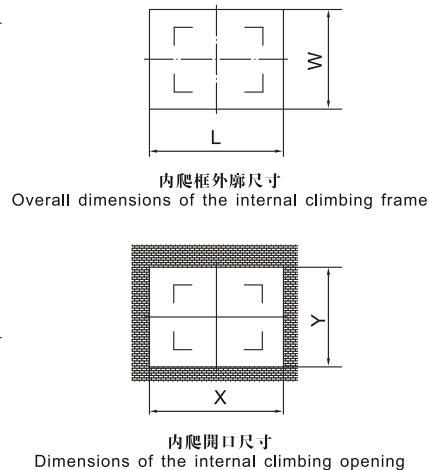
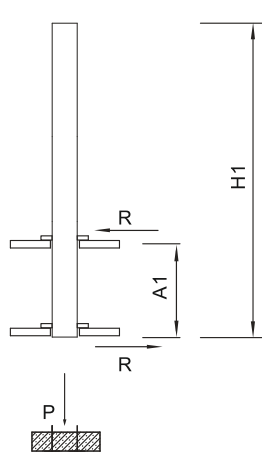
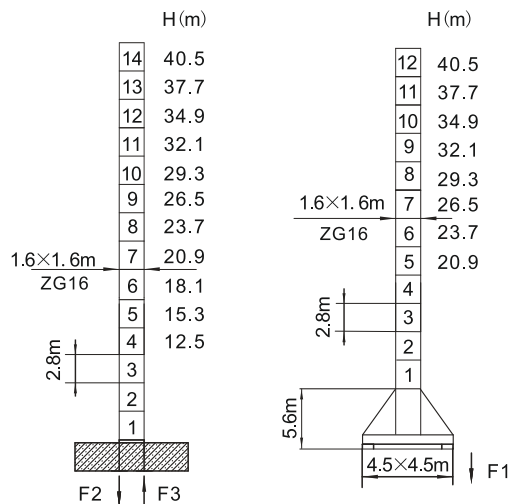


	●	■
F2	86t	128t
F3	51t	100t
	38t	

	●	■
F1	57t	68t
	46t	

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
ZG16	27.8	7-11	61	20.1	2.15	1.8	2.45	2.38

塔身截面 Mast L46A1/L46S 反力 Reactions

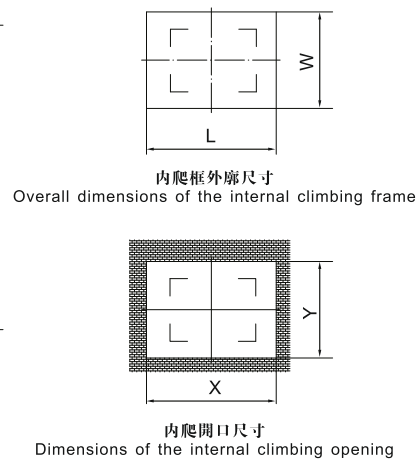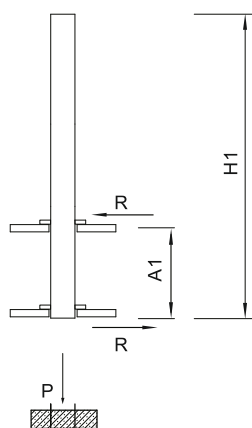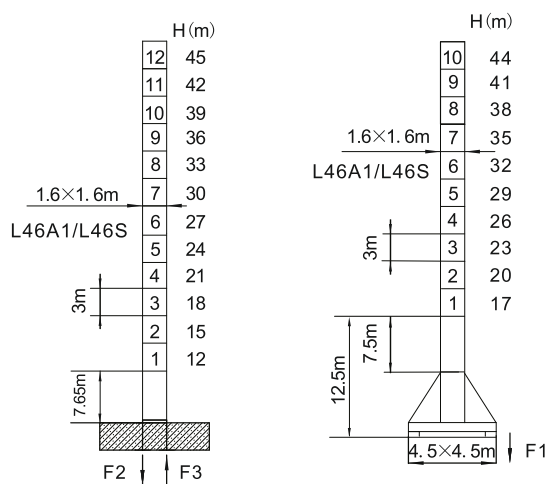

	●	■
F2	121t	150t
F3	82t	115t
	48t	

	●	■
F1	73t	80t
	58t	

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
L46A1/L46S	39	7-11	71	22.9	2.15	1.8	2.45	2.38

● 工作狀態支反力 In service reaction


■ 非工作狀態支反力 Out of service reaction

⚖ 整機自由高度重量 (不含平衡重及壓重重量)

Total weight of free standing crane (excludes counter weight & ballast)

8t/6t

塔身截面 Mast ZG18 反力 Reactions

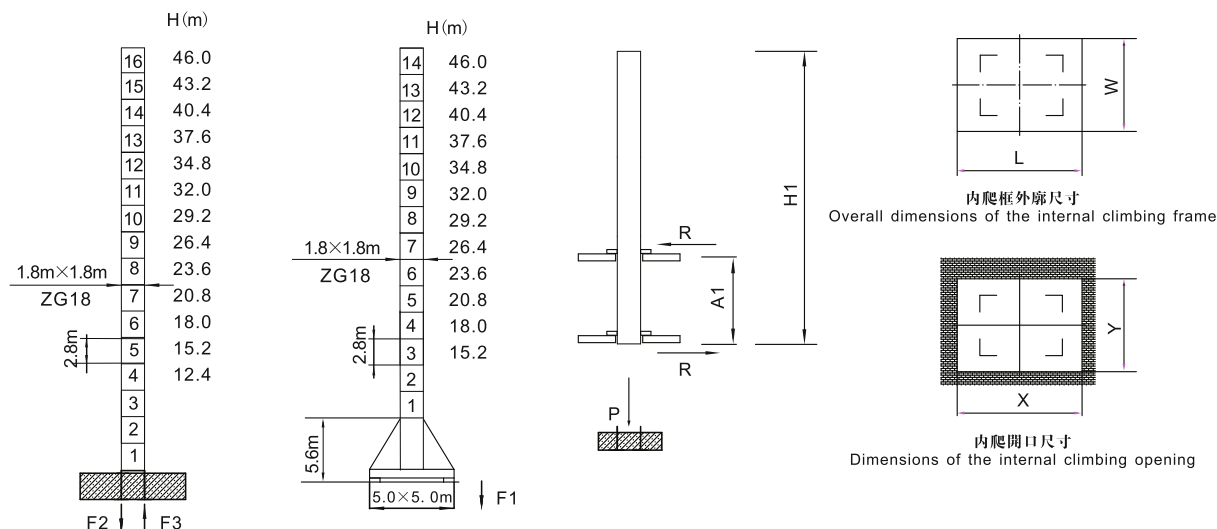

	●	■
F2	109t	133t
F3	69t	100t
⚙	49t	

	●	■
F1	71t	74t
⚙	59t	

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
ZG18	40.4	7-11	72	23	2.58	2.17	2.78	3.29


- 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
⚙ 整機自由高度重量（不含平衡重及壓重重量） Total weight of free standing crane (excludes counter weight & ballast)

附着 Anchoring


固定式附着高度 Anchoring height of stationary crane

塔身截面 Mast □1.6×1.6m (ZG16)

如需達到更高，請與我們聯系。When using height further, contact us please.

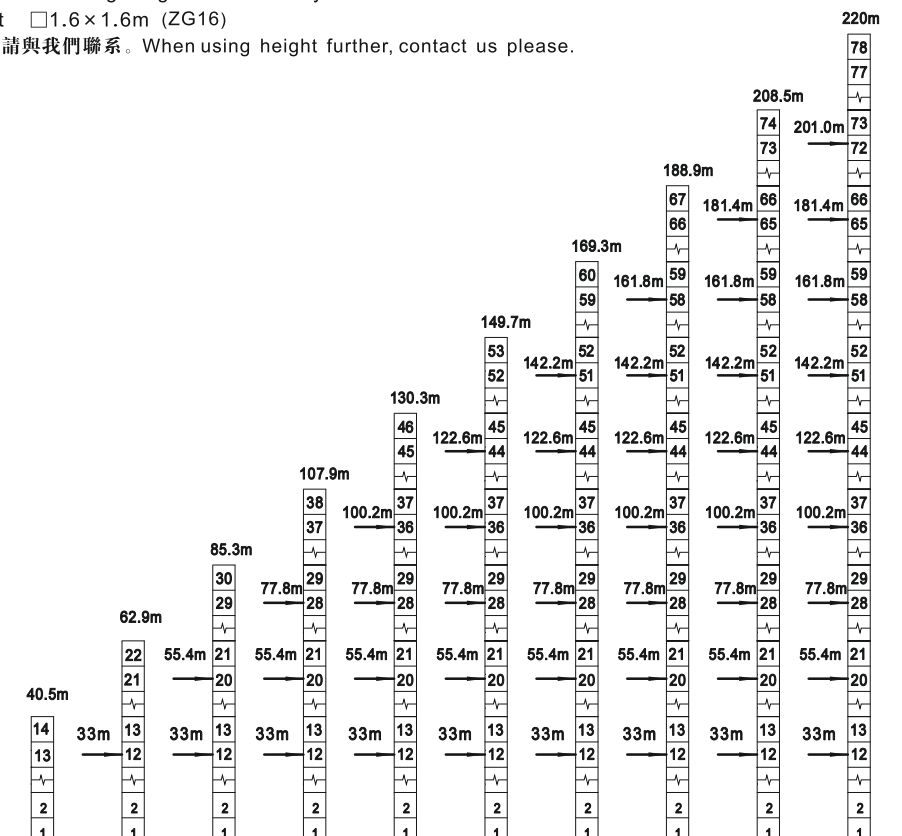


如需達到更高，請與我們聯系。When using height further, contact us please.



8t/6t

主要性能參數 Specifications

機構 Mechanism							電動機 Motor kW
		m/min	t	m/min	t		
	6t	30LVF15C	0-40 0-80	3 1.5	0-20 0-40	6 3	24
	8t	40LVF20B	0-38 0-76 0-115	4.0 2.0 0.8	0-19 0-38 0-57	8.0 4.0 1.6	30
	BP4065XZT		0-58 m/min				4.0
	RVF4.0		0-0.7 rpm				2×4.0
	RT		12.5-25 m/min				2×2.6/5.2

	電壓 Pressure	kVA
380V (±10%)	50Hz	30LVF15C:48 40LVF20B:56

* 與製造商聯系 Contact us, please.
☆ 標準配置 Standard configuration.